

#### RELIABLE


Sol's CTI-170 is a high-efficiency polycrystalline solar module that provides outstanding performance and cost-effective solar power for high-end off-grid and mobile applications. The module is built to last and features a 20-year limited power output warranty.

#### DURABLE

To ensure long life, the high-efficiency solar cells are encapsulated between a special tempered, low-iron solar glass and a Tedlar<sup>®</sup>/polyester backing material. The mounting frame, manufactured from anodized marine-grade aluminum, allows the CTI-170 to be installed in extreme conditions.

#### FEATURES

- Compact and rugged design
- Plug and play junction box
- Lightweight anodized aluminum frame
- High transmissivity tempered glass
- Industry standard quick-connect cables (MC4) work in series or in parallel
- **20-year limited power output warranty**

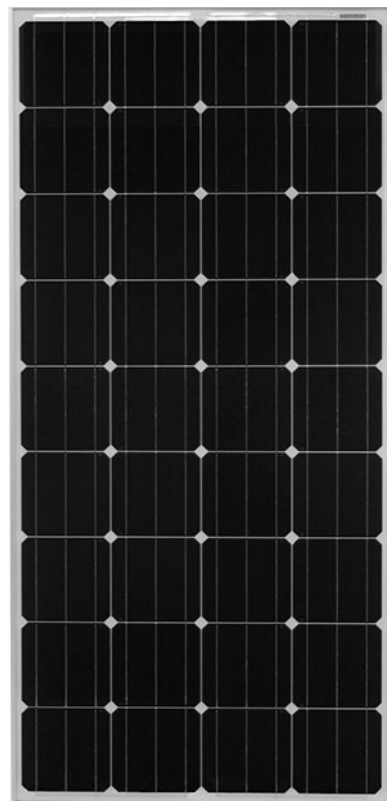

CTI-170






#### SPECIFICATIONS

Rated power (P <sub>m</sub> )	170W
Maximum power voltage (V <sub>mp</sub> )	19.60V
Maximum power current (I <sub>mp</sub> )	8.77A
Open circuit voltage (V <sub>oc</sub> )	23.20V
Short circuit current (I <sub>sc</sub> )	9.35A
Power coefficient	-0.42% / °C
Voltage coefficient	-0.31% / °C
Current coefficient	0.033% / °C
Max power tolerance	+/- 3W
Cell type	Polycrystalline
Module efficiency	17.0%
Series fuse rating	15A
Maximum system voltage	600VDC
Operating temperature	-40°C to 85°C (-40°F to 185°F)
Weight	11.16 kg (24.6 lb)
Dimensions	1500 x 668 x 40 mm 59.1 x 26.3 x 1.57 in
Frame type / material	Clear anodized aluminum frame
Certifications	UL 1703

#### Power Specifications calculated at STC:

- Irradiance: 1000 W/m<sup>2</sup>
- Cell Temperature: 77°F (25°C)
- Air Mass: 1.5

#### IV CURVE PARAMETERS

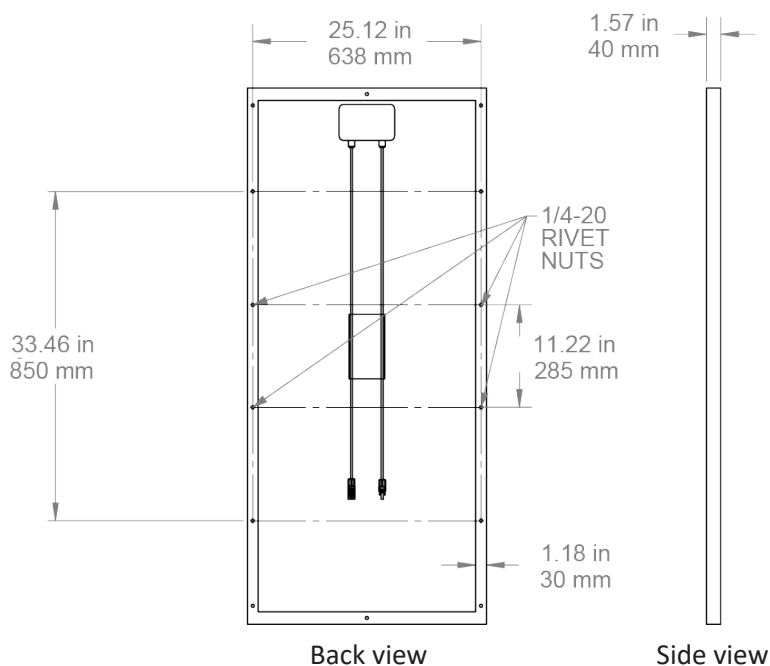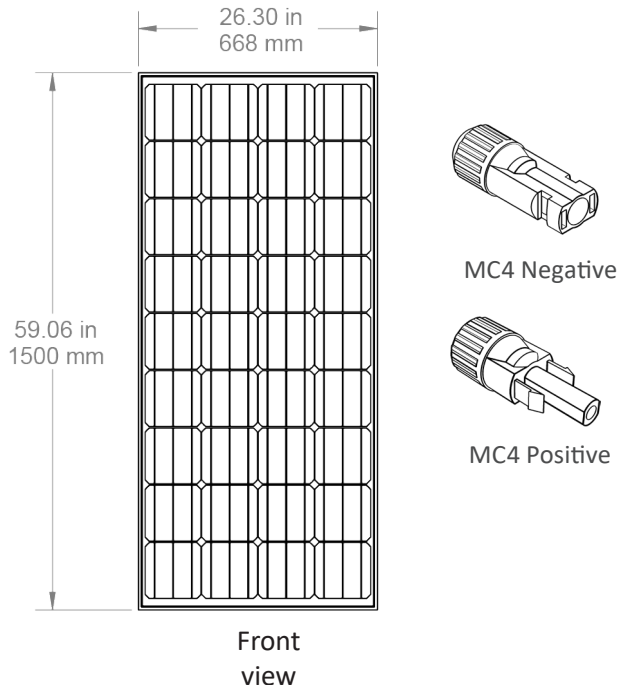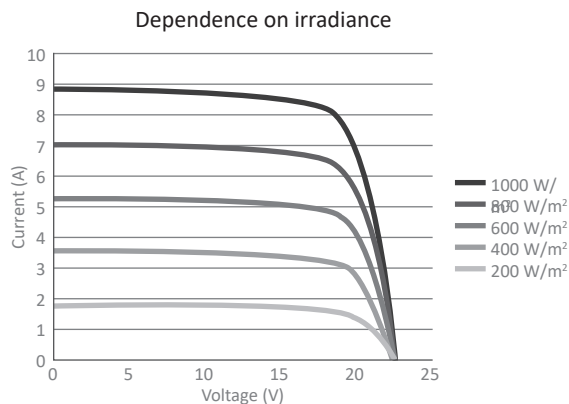

Specifications subject to local environmental conditions.  
Specifications may be subject to change.  
US and International patents apply. Other patents pending.  
"Sol" logo is a trademark of Sunna Design.

All Sol products are manufactured in facilities that are certified to ISO quality standards.  
Document: SPEC\_SOL-Sunna\_CTI-170\_RevA